


ALUMIL M940 Mini

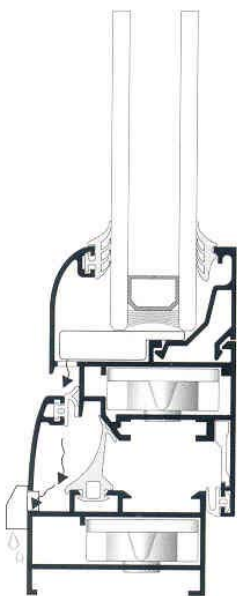

*The smallest and lightest product line
for “tilt-and-turn” frames*

Basic characteristics:

- ✓ 37 mm sash width
- ✓ “ALUSEAL” perimetrical sealing system, with three levels of EPDM gaskets.
- ✓ Supports all “tilt-and-turn” typologies.
- ✓ Cooperates perfectly with the M900 Aero for sliding frames.
- ✓ Supports single or double glazing, from 10 to 26 mm.

PROFILE TECHNICAL SPECIFICATIONS	
Extruded Alloy	AlMgSi0.5 6060
Hardness	12-14 HB
Minimum Powder Coating Thickness	0,75 mm
Profile Thickness (min-max)	
Profile Geometry Control	DIN 17615 Compliant

PRODUCT LINE TECHNICAL CHARACTERISTICS	
Basic Sash Width (Actual/Effective)	44/37 mm
Glazing Type	Single or Double, from 10 to 26 mm
Glazing Weight	
Sealing	“ALUSEAL” perimetrical sealing system, with three levels of EPDM gaskets

Construction options:

- ✓ One or two-sash doors and windows, with or without shutters.
- ✓ Main entrances.
- ✓ Profiles for angular constructions and other special applications.
- ✓ Perfect cooperation with Alumil’s M900 Aero for sliding frames

Certifications:

- ✓ The design, the production process, and the quality control of all profiles produced by Alumil are certified with ISO 9001.
- ✓ The process of electrostatic powder coating is certified by QUALICOAT and GSB in all plants operated by Alumil.